


PRESSURE RELIEF VALVE (PRV)



End Connection	: FPT / MPT / TOD
Female Pipe Thread Size (FPT/MPT)	: 1/8" to 2" NPT Female (Taper) Threads (BSPP / BSPT / ISO / Metric or Any Other Threads on Request)
Tube OD size (TOD)	: 1/4" OD to 1" OD (Fractional) From 6mm OD to 25mm OD (Matric)
Set Pressure	: As per Customer Requirement
Seal Ring	: Viton / Neoprene / Silicon
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: PRV - IN - OUT - MOC

2 VALVE MANIFOLD R TYPE (2VMR)



End Connection	: FPT
Female Pipe Thread Size (FPT/MPT)	: 1/4" to 2" NPT Female (Taper) Threads (BSPP / BSPT / ISO / Metric or Any Other Threads on Request)
Test Pressure	: Upto 6000 PSI / 10000 PSI
Gland Packing	: Standard PTFE (Grafoil for high temperature)
Type	: Remote Mounting Type
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: 2VMR - FPT - FPT - DRAIN - MOC

2 VALVE MANIFOLD T TYPE (2VMT)




End Connection	: FPT x TF
Female Pipe Thread Size (FPT/MPT)	: 1/4" to 2" NPT Female (Taper) Threads (BSPP / BSPT / ISO / Metric or Any Other Threads on Request)
Out / Process Connection	: Transmitter Flange (TF)
Test Pressure	: Upto 6000 PSI / 10000 PSI
Gland Packing	: Standard PTFE (Grafoil for high temperature)
Type	: Transmitter Mounting Type
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: 2VMT - FPT - TF - DRAIN - MOC

3 VALVE MANIFOLD R TYPE (3VMR)




End Connection	: FPT
Female Pipe Thread Size (FPT/MPT)	: 1/4" to 2" NPT Female (Taper) Threads (BSPP / BSPT / ISO / Metric or Any Other Threads on Request)
Test Pressure	: Upto 6000 PSI / 10000 PSI
Gland Packing	: Standard PTFE (Grafoil for high temperature)
Type	: Remote Mounting Type
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: 3VMR - FPT - FPT - DRAIN - MOC

3 VALVE MANIFOLD T TYPE (3VMT)

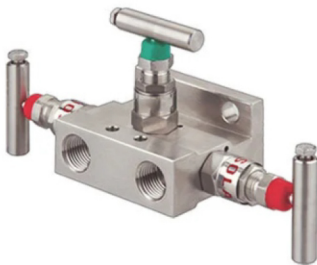


End Connection	: FPT
Female Pipe Thread Size (FPT/MPT)	: 1/4" to 2" NPT Female (Taper) Threads (BSPP / BSPT / ISO / Metric or Any Other Threads on Request)
Out / Process Connection	: Transmitter Flange (TF)
Test Pressure	: Upto 6000 PSI / 10000 PSI
Gland Packing	: Standard PTFE (Grafoil for high temperature)
Type	: Transmitter Mounting Type
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: 3VMT - FPT - TF - DRAIN - MOC

3 VALVE MANIFOLD H TYPE (3VMH)

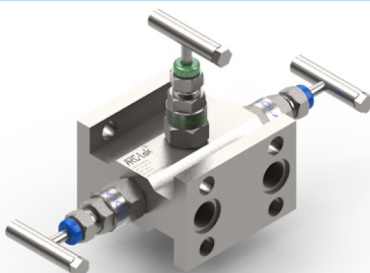

End Connection	: TF
In & Out / Process Connection	: Transmitter Flange (TF)
Test Pressure	: Upto 6000 PSI / 10000 PSI
Gland Packing	: Standard PTFE (Grafoil for high temperature)
Type	: Transmitter Mounting Type
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: 3VMH - FT - TF - DRAIN - MOC

5 VALVE MANIFOLD R TYPE (5VMR)

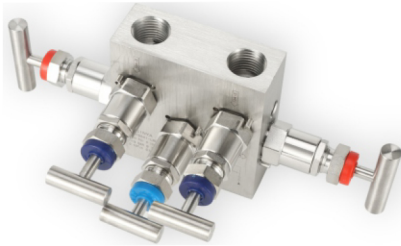

End Connection	: FPT
Female Pipe Thread Size (FPT/MPT)	: 1/4" to 2" NPT Female (Taper) Threads (BSPP / BSPT / ISO / Metric or Any Other Threads on Request)
Test Pressure	: Upto 6000 PSI / 10000 PSI
Gland Packing	: Standard PTFE (Grafoil for high temperature)
Type	: Remote Mounting Type
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: 5VMR - FPT - FPT - DRAIN - MOC

5 VALVE MANIFOLD T TYPE (5VMT)



End Connection	: FPT
Female Pipe Thread Size (FPT/MPT)	: 1/4" to 2" NPT Female (Taper) Threads (BSPP / BSPT / ISO / Metric or Any Other Threads on Request)
Out / Process Connection	: Transmitter Flange (TF)
Test Pressure	: Upto 6000 PSI / 10000 PSI
Gland Packing	: Standard PTFE (Grafoil for high temperature)
Type	: Transmitter Mounting Type
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: 5VMT - FPT - TF - DRAIN - MOC

5 VALVE MANIFOLD H TYPE (5VMH)



End Connection	: TF
In & Out / Process Connection	: Transmitter Flange (TF)
Test Pressure	: Upto 6000 PSI / 10000 PSI
Gland Packing	: Standard PTFE (Grafoil for high temperature)
Type	: Transmitter Mounting Type
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: 5VMH - FT - TF - DRAIN - MOC

MONO FLANGE (MF1)



End Connection / Type	: FPT x FL / ISOLATION TYPE
Female Pipe Thread Size (FPT/MPT)	: 1/4" to 1/2" NPT Female (Taper) Threads (BSPP / BSPT / ISO / Metric or Any Other Threads on Request)
Flange Connection (FL)	: 1/2" to 2" Flange / 150 to 2500 # / RF / RTJ
Flange Type (FT)	: ANSO B16.5 / DIN
Gland Packing	: Standard PTFE (Grafoil for high temperature)
Optional	: NACE Certification / Oxygen Service
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: MF1 - FPT - FL - DRAIN - OPTIONAL - MOC

MONO FLANGE (MF2)



End Connection / Type	: FPT x FL / BLOCK AND BLEED TYPE
Female Pipe Thread Size (FPT/MPT)	: 1/4" to 1/2" NPT Female (Taper) Threads (BSPP / BSPT / ISO / Metric or Any Other Threads on Request)
Flange Connection (FL)	: 1/2" to 2" Flange / 150 to 2500 # / RF / RTJ
Flange Type (FT)	: ANSO B16.5 / DIN
Gland Packing	: Standard PTFE (Grafoil for high temperature)
Optional	: NACE Certification / Oxygen Service
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: MF2 - FPT - FL - DRAIN - OPTIONAL - MOC

MONO FLANGE (MF3)



End Connection / Type	: FPT x FL / DOUBLE BLOCK AND BLEED TYPE
Female Pipe Thread Size (FPT/MPT)	: 1/4" to 1/2" NPT Female (Taper) Threads (BSPP / BSPT / ISO / Metric or Any Other Threads on Request)
Flange Connection (FL)	: 1/2" to 2" Flange / 150 to 2500 # / RF / RTJ
Flange Type (FT)	: ANSO B16.5 / DIN
Gland Packing	: Standard PTFE (Grafoil for high temperature)
Optional	: NACE Certification / Oxygen Service
MOC	: SS316, 304 / Alloy 400, 600, C276 etc..
Model Code (*)	: MF3 - FPT - FL - DRAIN - OPTIONAL - MOC